#60: Snyders Lake Road (CR 68) Pavement Preservation

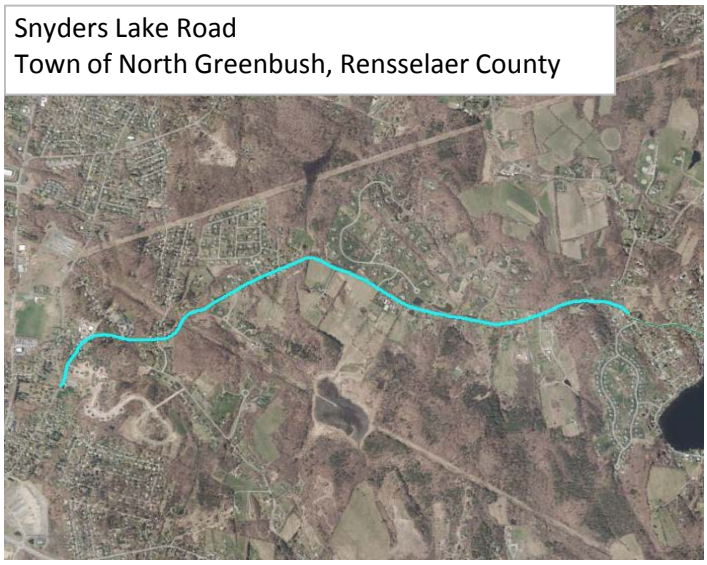

Total Score = A+B (100 Points Max)	35.9

A. Benefit/Cost Ratio Total (50 point cap)	30.9
Benefit/Cost Ratio Subtotal	30.9
Total Benefits ($1,000/Year)	2,445.8
Facility Life	2,414.1
Mobility	0.0
Safety	13.0
User Cost	18.7
Annualized Cost ($1,000/Year)	79.2

B. Merit Category Score (Scaled to 50 Points)	5.0

CDTC Project Category: Local Low Volume - Pavement Preservation

Project Limits: CR 65 (Bloomingrove Drive) to Troy Avenue
Sponsor: Rensselaer County
Sponsor Priority: 1 in Pavement Category
Total Cost: $0.583 M (includes match and inflation)

Existing Pavement Rating: Ranges from 5 to 6
Average Daily Traffic Volume: 2,446
Repair Type: 2" Hot Mix Asphalt Overlay
Proposed Project Design Life: 10 years

Detailed Description: Preserve the pavement with a 2" Hot Mix Asphalt Overlay.

Roadway Functional Classification: Snyders Lake Road is not a National Highway System facility and is classified as an Urban Major Collector road.

Federal Fund Source Eligibility: Surface Transportation Program

Transportation Considerations:

Walking: Not in a CDTC Pedestrian District and makes no commitment to pedestrian facilities.

Biking: Not on CDTC Bicycle Network. No bicycle infrastructure improvements.

Transit: Does not add, upgrade, or remove transit components.

Motor Vehicles/Freight: Project has neutral affect (no known impact, positive or negative) on freight and/or goods movement.

Other Considerations: Project will be designed by the sponsor for a maximum amount payable (preliminary and final design) of $4,000. Construction Inspection services will be solicited. Adjacent to an Environmental Justice area.

Advisory Committee Comments: None noted.